

INDUSTRIAL HOSES



MAFLEX


Use: For standard use in agriculture and industry, for transporting water and air.

Material: Plasticized PVC.

Design: Inner tubing black, casing bright yellow. Reinforced structure.

Working temperature: Water + 1°C to + 50°C, air - 5°C to + 50°C.

| dimensions inner/outer | | order number | length | operation pressure at 20° C | destruction pressure at 20° C |
|------------------------|-----|--------------|--------|-----------------------------|-------------------------------|
| mm | " | code | m | bar | bar |
| 19/13 | 1/2 | 020803DK | 25, 50 | 10 | 32 |
| 23/16 | 5/8 | 020804DK | 25 | 8 | 26 |
| 28/20 | 3/4 | 020805DK | 25 | 8 | 24 |

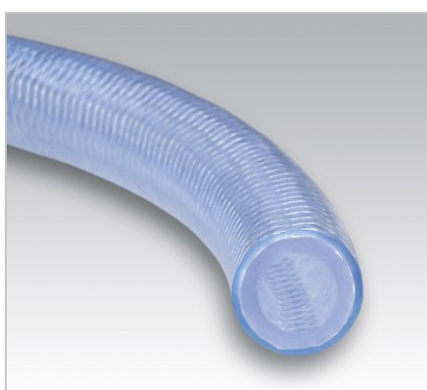

MAPRES


Use: For heavy use in agriculture and industry, suitable as a cooling water and pressurised air connection to machinery.

Material: Plasticized PVC.

Design: Inner tubing transparent, bluish transparent casing. Reinforced structure and winding fabric casing.

Working temperature: Water + 1°C to + 50°C, air - 5°C to + 50°C.

| dimensions inner/outer | | order number | length | operation pressure at 20° C | destruction pressure at 20° C |
|------------------------|------|--------------|--------|-----------------------------|-------------------------------|
| mm | " | code | m | bar | bar |
| 14,5/8 | 5/16 | 020701AH | 50 | 20 | 60 |
| 16,5/10,5 | 3/8 | 020702AH | 25 | 18 | 54 |
| 22/12,5 | 1/2 | 020703AH | 25, 50 | 16 | 48 |

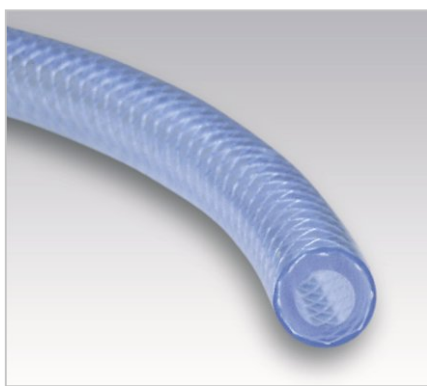

MATEX


Use: For transporting gaseous, liquid or solid substances in all branches of industry. Resistant to climatic effects.

Material: Plasticized PVC.

Design: Inner tubing and casing transparent blue. Winding fabric casing.

Working temperature: - 5°C to + 60°C.

| dimensions inner/outer | | order number | length | operation pressure at 20° C | destruction pressure at 20° C |
|------------------------|--------------|--------------|--------|-----------------------------|-------------------------------|
| mm | code | m | bar | bar | |
| 12/6 | 0225060120HD | 25, 50 | 20 | 50 | |
| 14/8 | 0225080140HD | 25, 50 | 20 | 50 | |
| 15/9 | 0225090150HD | 25, 50 | 15 | 35 | |
| 20/13 | 0225130200HD | 25, 50 | 17 | 40 | |
| 27/19 | 0225190270HD | 25, 50 | 14 | 32 | |

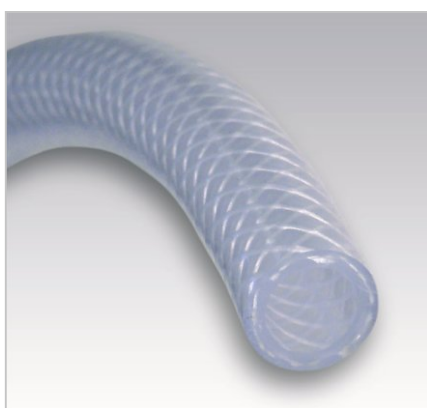

MAFRESH

Use: Suitable for transporting fruit and vegetable juices, pressed juice, fruit nectar, lemonades, beer, syrup, ketchup, coffee, tea, wine and vinegar.

Material: Phtalate-free plasticized PVC.

Design: Inner tubing and casing transparent. Winding fabric casing.

Working temperature: + 5°C to + 50°C.

| dimensions inner/outer | | order number | length | operation pressure at 20° C | destruction pressure at 20° C |
|------------------------|-----|--------------|--------|-----------------------------|-------------------------------|
| mm | " | code | m | bar | bar |
| 14,5/10 | 3/8 | 021502AA | 50 | 10 | 30 |
| 17/12,5 | 1/2 | 021502AA | 25, 50 | 10 | 30 |
| 22/16 | 5/8 | 021502AA | 25, 50 | 10 | 30 |
| 26/19 | 3/4 | 021502AA | 25, 50 | 9 | 27 |
| 33/25,5 | 1 | 021502AA | 25 | 6 | 18 |

INDUSTRIAL HOSES

MAFUEL

Use: As a result of its chemical stability this product is also intended for transporting various types of petrol, diesel and oil.

Material: Plasticized PVC.

Design: Without reinforcement, transparent purple.

Working temperature: - 5°C to + 50°C.

| dimensions inner/outer | order number | wall thickness | coil length* |
|---------------------------|--------------|----------------|--------------|
| mm | code | mm | m |
| 6/4 | 0404000600 | 1 | 25 |
| 7/4 | 0404000700 | 1,5 | 25 |
| 8/5 | 0405000800 | 1,5 | 25, 100 |
| 9/6 | 0406000900 | 1,5 | 25 |
| 10/6 | 0406001000 | 2 | 25 |
| 10/7 | 0407001000 | 1,5 | 25 |
| 11/8 | 0408001100 | 1,5 | 25 |
| 12/8 | 0408001200 | 2 | 25 |
| 13/10 | 0410001300 | 1,5 | 25 |
| 14/10 | 0410001400 | 2 | 25 |

*please inquire about other coil lengths



MAKLAR

Use: For use during free-flow transport of water and air.

Material: Plasticized PVC.

Design: Inner tubing and casing transparent light blue.

Working temperature: Water + 1°C to + 50°C, air - 5°C to + 50°C.

Comment: Goods not held in stock, made to order.

| dimensions inner/outer | wall thickness | order number | coil length* |
|---------------------------|-------------------|--------------|--------------|
| mm | mm | code | m |
| 6/3 | 1,5 | 0220030060 | 100 |
| 6/4 | 1,0 | 0220040060 | 100 |
| 7/4 | 1,5 | 0220040070 | 25 |
| 8/4 | 2,0 | 0220040080 | 100 |
| 8/5 | 1,5 | 0220060090 | 100 |
| 9/6 | 1,5 | 0220060090 | 100 |
| 10/6 | 2,0 | 0220060100 | 50 |
| 10/7 | 1,5 | 0220070100 | 100 |
| 12/8 | 2,0 | 0220080120 | 100 |
| 12/9 | 1,5 | 0220090120 | 50 |
| 16/12 | 2,0 | 0220120160 | 50 |
| 18/12 | 3,0 | 0220120180 | 50 |
| 19/15 | 2,0 | 0220150190 | 50 |
| 20/16 | 2,0 | 0220160200 | 40 |
| 22/16 | 3,0 | 0220160220 | 40 |
| 22/18 | 2,0 | 0220180220 | 50 |
| 24/19 | 2,5 | 0220190240 | 25 |
| 31/25 | 3,0 | 0220250310 | 25 |

*please inquire about other coil lengths

