


dripnose bead

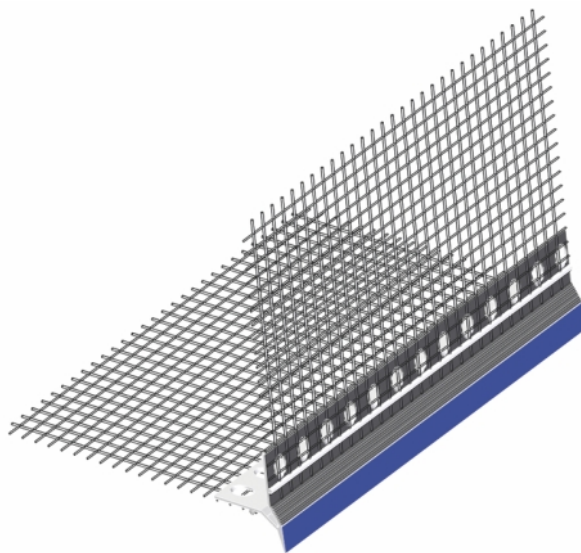

- provided with protective removable tape on the visible edge
- utilization with outer plasters, for a prevention of water under-flowing (e.g. window or door ceiling, etc.)
- prevents flowing of water under the plaster that might damage the construction upper covering
- an edge protection, from a mechanical damage
- aesthetics – a perfectly straight edge
- connection of the profile with glass fibre mesh to reinforcing mesh fabrics used on thermal insulation system surface
- the profile surface can be easily re-painted by a facade paint

Material	Dimension	Ordering No.	Length	Packing
	mm		m	pcs
PVC	18 x 18 wgm 100 x 100	D/05	2,5	25
PVC	18 x 18 wgm 100 x 100	D/05.1	2,0	25

Recommendation:

The admitted edge has to be clean, without plaster. During painting, the edge may be painted with paint.

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place. Maximum recommended storage time is 24 months.