


movement bead co-extruded V type K2

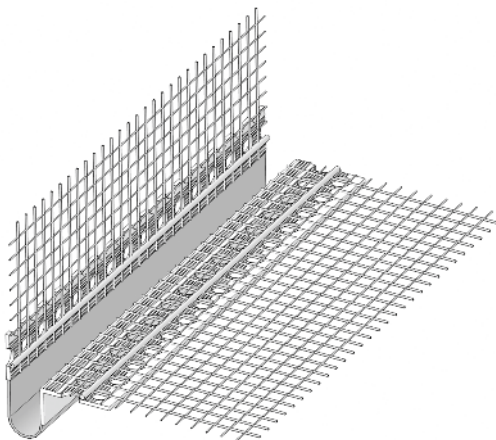

- protection against cracking arisen due to insulation material tension
- the profile for moving joints
- providing of an equal dilatation connection
- length of dilatation tape 40 mm
- the permanent joint sealing, resistant against outer atmosphere
- prevention of entry of pollution and humidity under the insulation material
- a universal profile size, suitable to all insulation material widths
- the profile is designated to protrusive surfaces
- the profile dilatation part is made of a resistant, soft PVC

| Material | Dimension | Ordering No. | Length | Packing |
|----------|----------------|--------------|--------|---------|
| | mm | | m | pcs |
| PVC | 40 wgm 110x110 | D/31 | 2,5 | 25 |

Recommendation:

During connecting, the protrusive dilatation part has to be carried over the lower profile. The using is only vertical. Perform the cutting with special profile scissors.

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place. Maximum recommended storage time is 24 months.