


movement bead co-extruded V type K2

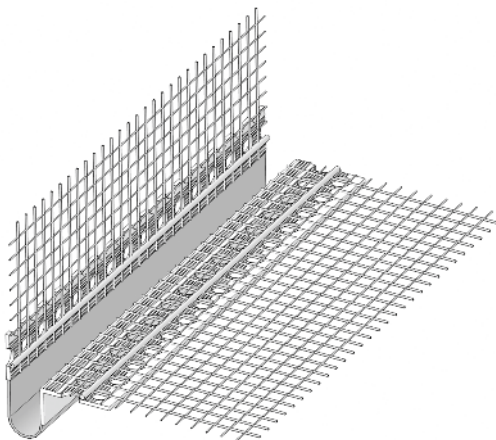

- protection against cracking arisen due to insulation material tension
- the profile for moving joints
- providing of an equal dilatation connection
- length of dilatation tape 40 mm
- the permanent joint sealing, resistant against outer atmosphere
- prevention of entry of pollution and humidity under the insulation material
- a universal profile size, suitable to all insulation material widths
- the profile is designated to protrusive surfaces
- the profile dilatation part is made of a resistant, soft PVC

Material	Dimension	Ordering No.	Length	Packing
	mm		m	pcs
PVC	40 wgm 110x110	D/31	2,5	25

Recommendation:

During connecting, the protrusive dilatation part has to be carried over the lower profile. The using is only vertical. Perform the cutting with special profile scissors.

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place. Maximum recommended storage time is 24 months.