




floor expansion joints 10

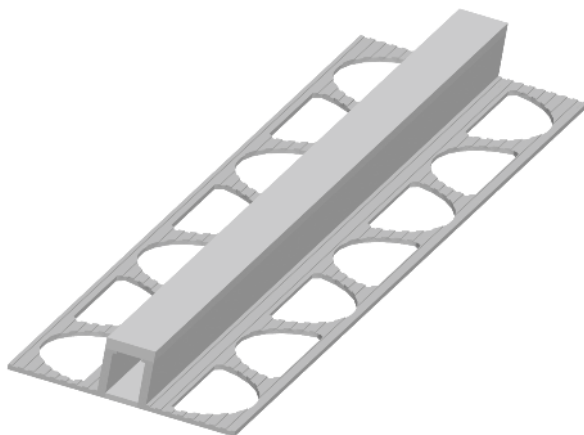

- a double-sided dilatation eliminates pressure in all directions thus simplify installation even in big areas
- divides bigger tiling areas in manner that no tiling area lifting or cracking in gaps occur as caused by humidity and/or temperature changes
- plastic dilatation profiles may be successfully used instead of steel dilatations
- on pollution of a bigger extent, environmentally decomposable detergents can be used

Material	Dimension	Ordering No.	Length	Packing
	mm		m	pcs
PVC	10	B/08.1 bahama	2,5	40
PVC	10	B/08.2 grey	2,5	40

Recommendation:

The profile has to be let into tiling in order to prevent co-extruded part tearing-off.

Storage:

A horizontal storage position is recommended. The profiles packed in cardboard covers need to be stored in a dry place. Maximum recommended storage time is 24 months.