


# flat window profile 50

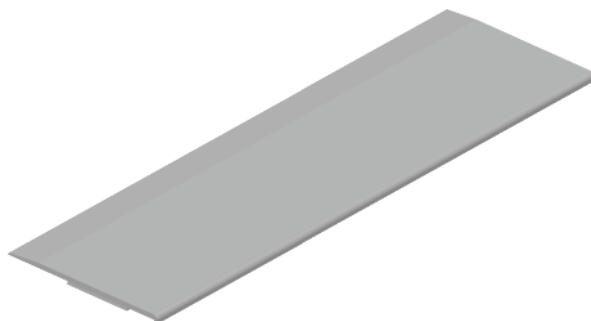

- utilization on “dry” window replacement
- time saving during finishing works
- aesthetic covering of PUR foam filled between the window frame and wall (stucco)
- adhesion of the soft plastic co-extrusion to the plaster
- elimination of penetrating of humidity and pollution

Material	Dimension	Ordering No.	Length	Packing
	mm		m	pcs
PVC	50	A/09	2,4	50

## Recommendation:

For a firm connection, the base has to be dry, even, free of adhered pollution, dust and grease. The corner connection may be solved by cutting to a bevel or by using of the corner connecting. The co-extruded part is chemically stable. Application temperature (the temperature of the window frame, window molding and surrounding) must not be lower than 5°C. At low temperatures and strong winds, there must be counted with a lower starting glairiness and a longer time for the reaction of the adhesive with the window frame.

## Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place, the temperature range of -5°C to +40°C. The profiles need to be stored in a dry and annealed place. Maximum recommended storage time is 18 months.